

ResponseCME™ – Fire Door Lite Kit

*ResponseCME -
A great addition to
the Oshkosh Door
Company family of
products!*

LEED® Friendly!

ResponseCME
contributes to
LEED 2.2!

Oshkosh Door Company
2501 Universal Street
Oshkosh, WI 54903
Phone: 920.233.6161
Fax: 920.233.5022
E-mail:
doors@oshkoshdoor.com
Website:
www.oshkoshdoor.com

Oshkosh Door Company is proud to introduce the ResponseCME fire door lite kit as part of our growing product portfolio. This Warnock – Hersey listed lite kite is available in 20 – 90 minute rated doors and is an attractive alternative to painted or wood wrapped metal vision frames.

ResponseCME is available in either flush or lip profiles and comes in a variety of wood species. This lite kit truly allows architects the best of both worlds....The wood lite kits they prefer to use while maintaining fire – ratings as required by codes.

Factory finished to match the door faces, this lite kit puts that special touch on any door!




The internal clip system holds the glass in place in the event of a fire. The moulding is ejected from the opening, preventing fire from spreading to the unexposed face of the door.

ResponseCME™ – Technical Information

The ResponseCME lite kit is available in two standard profiles (shown at right).

The table below is the Summary of Listings for the ResponseCME lite kit. Please contact the Oshkosh inside sales department should you have any questions.

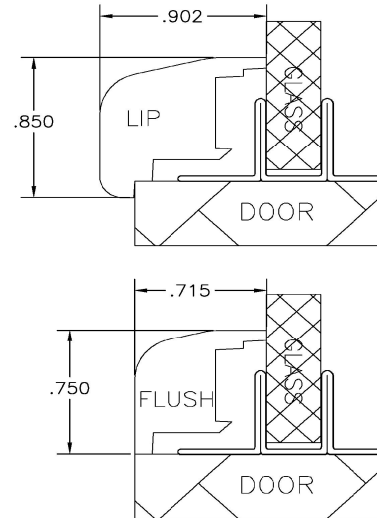

ResponseCME - Fire Door Lite Kit						
Door Fire Rating Core	20 – Min Wood Based	45 – Min Wood Based	45 – Min Mineral Core	60 – Min Wood Based	60 – Min Mineral Core	90 – Min Mineral Core
Max Exposed Glass Area	744 sq. in.	432 sq. in.	744 sq. in.	N/A	100 sq. in.	100 sq. in.
Dimension Restrictions on Exposed Glass	Height not to exceed 31 in.	Height not to exceed 24 in.	Height not to exceed 31 in.		None up to 100 sq. in.	
Wood Species Available	Oak – Maple – Cherry – Paint Grade --Contact Oshkosh Door Company for availability of species not listed					
Moulding Styles Available	Flush and lip -- Glass size must be specified as 3/16", 1/4" or 5/16"					

Due to the pending change in NFPA – 80 and the nature of this lite kit, Oshkosh Door Company is only offering this lite option as factory installed.